

COMPACT COVER

with Removable Hinge Design
for Blending Station® Models



COMMERCIAL CUSTOMER SERVICE:

US, CANADA & LATIN AMERICA

Tel: 800-4DRINK4, 800-437-4654, 440-235-0214; Fax: 440-235-9670

Email: foodservice@vitamix.com; www.vitamix.com/foodservice

ALL OTHER COUNTRIES contact your local Vita-Mix Distributor
or telephone: +1.440.782.2450; Fax: +1.440.782.2220

Email: international@vitamix.com; www.vitamix.com/foodservice



FOODSERVICE

VITA-MIX® CORPORATION

8615 Usher Road, Cleveland, Ohio 44138-2103 USA

©2005 Vita-Mix Corporation. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording or any information storage and retrieval system without the written permission of the Vita-Mix Corporation.



FOODSERVICE

IMPORTANT! PLEASE READ THE FOLLOWING INFORMATION CAREFULLY. THE VITA-MIX® COMPACT COVER MUST BE USED IN ACCORDANCE WITH THESE INSTRUCTIONS.

COMPACT COVER INSTRUCTIONS

Cover Door:

1. The Cover Door can be removed by opening it until the door is horizontal. Then, gently spread the sides of the door over the round hinges and remove.
2. To reinstall the Cover Door, gently spread the sides of the door and place the door hinge cutouts over the round hinges.

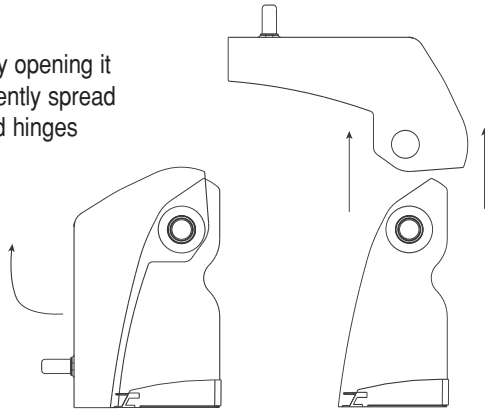


Figure A

Back Cover:

1. To remove the Back Cover from the Blending Station:
 - a. First remove the Cover Door from the unit as described above.
 - b. Remove the two (2) Back Cover mounting screws from the rear of the machine (see Figure B).
 - c. From the rear of the machine, firmly push the bottom of the cover forward (towards the Control Panel), keeping the bottom edge of the cover against the Motor Base. **DO NOT tilt or strike the cover during removal.**
 - d. Slide forward until the side latches on the front of the cover are released from the Motor Base (see Figure C). **DO NOT strike the cover to "pop" the side latches from their tracks. Doing so will cause damage. The cover must only be removed by sliding it forward (towards the Control Panel).**




Figure B




Figure C

2. To replace the Back Cover on the Blending Station:

- a. Place the Back Cover on the Motor Base approximately 1 inch / 2.4 cm forward of its normal position.
- b. Slide the cover towards the back of the machine (away from the Control Panel). **Make sure the side latches slide into their tracks.**
- c. Push until back of cover is seated against the Motor Base (see Figure D). **Make sure the Back Cover is fully seated in the back and the side latches are in their grooves before inserting and tightening the mounting screws.**

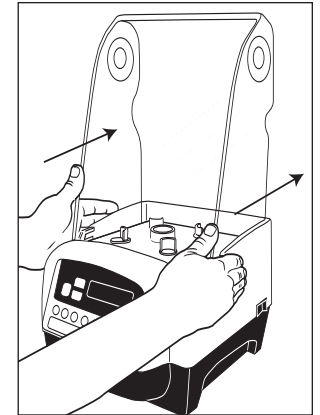


Figure D

- d. Replace and firmly hand-tighten the two (2) Back Cover mounting screws (see Figure B). **DO NOT over-tighten or use any tools to tighten. DO NOT use the mounting screws to pull the Back Cover into position. Doing so will cause damage.**



CARE AND CLEANING

The Cover can be removed (see Compact Cover Instructions) and cleaned by placing under running water and washing with a soft cloth. Wipe dry and replace back on the base.

⚠ DO NOT wash Cover Door, handle or Back Cover in dishwasher. DO NOT use abrasive cleaning agents or concentrated bleach when cleaning. DO NOT use any cleaners containing Quaternary Sanitizers.

NOTE: It is recommended that the handle not be disassembled during cleaning. However, if you choose to disassemble the handle from the cover, make sure to not over-tighten it when reattaching it to the cover. Doing so will cause damage.